


ACZT-USB-A2D SERIES

DIMENSIONS(mm)

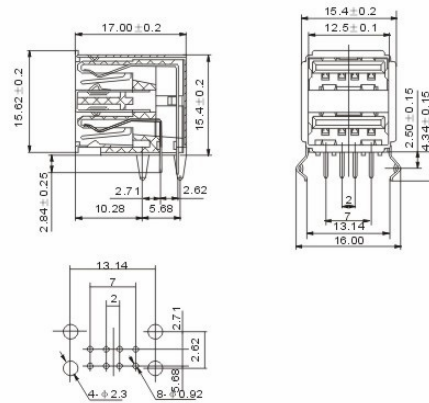

PARAMETERS

Housing	Thermoplastic, UL94V-0
Temperature Range	-20°C to +85°C
Contact	Copper Alloy
Shell	Copper Alloy
Real Shell	Steel
Voltage Current Rating	1AMP, 30V AC
Insulation Resistance	1000M Ω Min
Contact Resistance	30m Ω Max
Dielectric Withstanding Voltage	500V AC